


双工器 (Duplexer):

Model	DP-450M10-01A	
通道 Channel	Receive	Transmit
通带频率 Passband	455.0125MHz	465.0125MHz
插入损耗 Insertion Loss	1.5dB	1.5dB
通带起伏 Passband Ripple	1.0dB	1.0dB
隔离度 Isolation	75dB	75dB
带外抑制 Rejection	--	--
回波损耗 Return Loss	14dB	
功率容量 Power Handling	25W	
阻抗 Impedance	50 Ω	
连接器 Connectors	N-F	
工作温度 Operating Temp	-25 - +55	

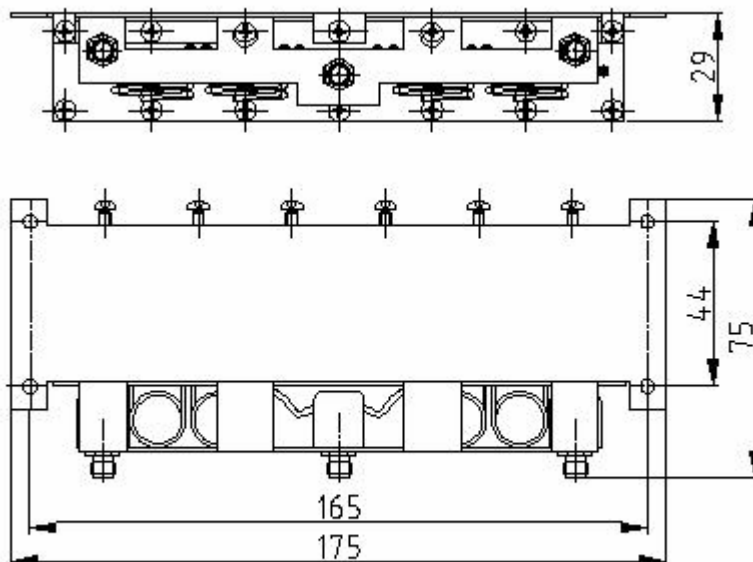

UHFDP-450M10-01A