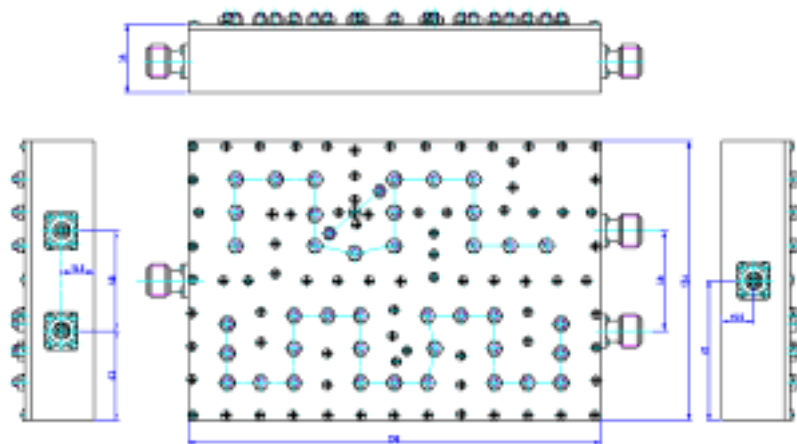


## 合路器 (Combiner):

<b>Model</b>	<b>CB-2025M145-06A</b>	
通道 Channel	CH1 DCS	CH2 TD-SCDMA(A&B)
通带频率 Passband	1710-1835 MHz	1880-2025MHz
插入损耗 Insertion Loss	0.6	0.6
通带起伏 Passband Ripple	0.4	0.4
隔离度 Isolation	80dB@ CH2	80dB@ CH1
驻波比 VSWR	1.25	
三阶交调 IM3	-120dBc ( +43dBm*2 )	
阻抗 Impedance	50	
功率容量 Power Handling	200W	
连接器 Connectors	N-Female	
工作温度 Operating Temp	-25 ~ +65	


**CB-2025M145-06A**